


SHOWER BATH
ENCLOSURES

by

Lehman



"Custom made by Lehman" means vastly more than stock equipment made to special sizes. It is a guarantee of high quality, fine materials, expert craftsmanship, strict adherence to specifications, and includes a sincere interest in the individual problems of each project, honest and intelligent cooperation of a nation-wide organization with architect, plumbing wholesaler, contractor and owner. It embraces those intangible elements of service which can not be catalogued, but which give assurance that the equipment when installed will function satisfactorily. A Lehman enclosure is more than a hinge, a frame and a piece of glass. It is a quality product, moderate in cost, the result of years of experience, careful engineering and special facilities and will give life time service.



Lehman

SHOWER ENCLOSURES

The Bath Immaculate ➤



504 Corner Shower Compartment. Built any size, plain or ornamented. Plan "B"—Right hinge door shown for tile, terrazzo or other receptor.

*Don't Forget
Don't Forget*



412-44 Sprayshields swing in and out.
812-44 Same but for Four ft. bathtub.
412 and 812 Same without 44 grille.
702-704 Glass designs are special.

SPARKLING GLASS

RADIANT CHROMIUM

CUSTOM MADE

DURABLE BRONZE




LEHMAN SPRAYSHIELD COMPANY

2514-18 NORTH BROAD STREET, PHILADELPHIA, PA.

Service and Sales Representatives in Principal Cities

LEHMAN SHOWER BATH ENCLOSURES

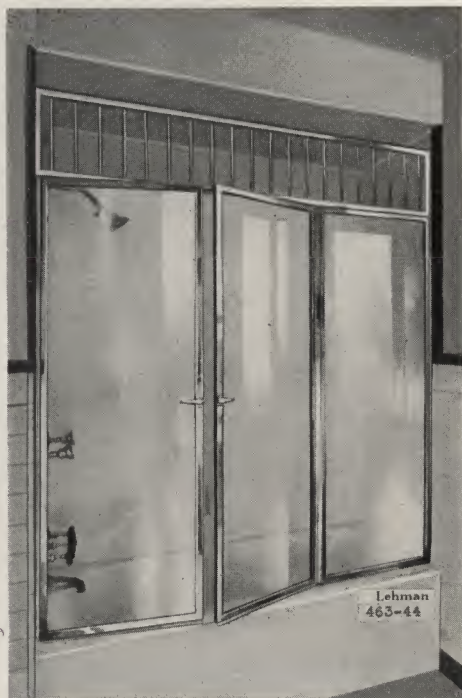

463-44 Enclosure for recess bathtub.
463 Same but without 44 grille top.
Any panels may be hinged as required.



461 Round corner bathtub enclosure.
Other bathtub arrangements—page 12.

*Comfort, Health Protection,
Convenience and Safety
economically built into a prized,
life long possession—a beautiful
Lehman Shower Bath Enclosure*

Shower bath equipment that is always clean and inviting is essential to the truly modern home. Shower curtains are as out-dated as tin bathtubs.

Sparkling plate glass and gleaming chromium bronze have no equal for bath enclosure construction—durable, sanitary, watertight, ornamental, light transmitting. Lehman doors, shields and enclosures are economical, measured by years of service. Why tolerate damp, perishable curtains that harbor germs and must be laundered? Make the first cost the last.

Antiquated bathrooms are embarrassing and often condemn buildings as prematurely obsolete. Plumbing is an index of rental, sales and mortgage values. Leaky showers cause damage. Sturdy Lehman showers are profitable investments, retarding depreciation of new, and rejuvenating old structures.

This booklet aims to present practical data helpful in planning modern, attractive bathrooms. It is not an elaborate catalog of fanciful photographs and misleading superlatives. The pictures show typical installations, but since Lehman equipment is custom built, all possible arrangements and ornamentation cannot be presented. Our engineering department will submit details, estimates and designs to meet individual requirements, without obligation.

We, as pioneer craftsmen have specialized in this one field since 1924. Attempts have been made by others to imitate designs, but without employing our heavy construction. We invite comparisons based not on price alone, but also on bronze weight, glass quality, workmanship and exclusive features. Unequaled facilities and engineering skill are utilized in custom designing each item for its particular bathroom, with special fittings for marble, tile, structural glass and irregular conditions, thus reducing erection costs.

Inspect our nearest display. The 42 pounds of metal and heavy glass in our average door will convince you of Lehman superiority. Among our visitors, who are always welcome at our factory and showrooms, an architect recently remarked: "It feels and sounds like a bank vault door, not like a bread box." There is no substitute for quality.

We are constantly perfecting Lehman equipment by developing such refinements as our patented floating roller latch—efficient and dependable. Lehman mounting bucks provide for attaching hinge and jamb without drilling structural glass, etc. Our improved telescoping apron with concealed drain trough carries drippage back into shower when door is swung open and deflects water to the inside of compartment when shower is in operation.

SOME LEHMAN PATENTED FEATURES

Monosleeve hidden hinge—compensates for building settlement.
Inward swinging of bathtub shields—out of way when not in use.
Bracket hinge of sprayshields—allows clearance space for valves.
Telescoping drainage apron—for waterproofing at threshold.
Telescoping jamb of door—adjustable for variations of tile.
Latch with floating roller bolt. Reinforcement of corners.
Mounting buck (pend)—fixes door direct to studding, adjustable.

A few Lehman models—standard size—in warehouse stocks in many cities

LEHMAN SPRAYSHIELD COMPANY, 2514-18 N. BROAD ST., PHILADELPHIA, PA.

LEHMAN SHOWER BATH ENCLOSURES

*"There is hardly anything in the world
that some man can not make a little
worse and sell a little cheaper, and those who
consider price only are this man's lawful prey"*

John Ruskin

Lehman shower bath enclosures are inexpensive but are built up to a standard of quality—not down to a price. Generous quantities of the finest materials, carefully fabricated, offer the ultimate in beauty, sanitation, comfort, durability and watertightness, yet cost but little more than light-weight construction. Everything we make bears our name and is fully guaranteed.

Lehman products have earned the endorsement of architects and responsible plumbing wholesalers who catalog and display them from Quebec to Texas, from Florida to Vancouver. We can not permit an unadjusted complaint of a single one of their clients to endanger their patronage. We maintain a coast-to-coast service organization to insure satisfaction. Merchandise which does not merit trade acceptance usually relies on price appeal or occasional buyers and lacks this double guarantee.


Genuine plate glass is used when specified, not window glass parading as "demi-plate" or "commercial plate." In Lehman enclosures you will not find flash plating, skimmed polishing, thin tubing, aluminum, flimsy frames, vague descriptions or avoidance of definite glass specifications. In craftsmanship, glass quality and bronze weight, our popular-priced models compare favorably with most, so called, "de luxe" equipment.

As examples of the great care used in Lehman construction, note our process of pressure pad glazing that protects glass from contacts with bronze and provides for expansion and contraction. To promote cleanliness and protect plating, sharp edges and fillets are avoided in Lehman special metal shapes. Ordinary brass screws do not meet our standard. If they break, they waste erector's time or become concealed defects. If they stretch, doors may drag and shake. Our screws are high strength alloys, specially made to Lehman specifications. Insist on Lehman quality bath equipment.

Buy your shower enclosures, tile, bathroom fixtures, etc., from your local contractor or plumbing wholesaler.


LEHMAN MONOSLEEVE HINGE

Machined with door glazing frame from one bar of solid bronze. Full length cylinder eliminates hundreds of dirt-catching crevices and screw heads. Sag proof. Leak proof. Vertical adjustment simplifies installation. Solid bronze hinge and frame of Mermaid and Gem models shown actual size.

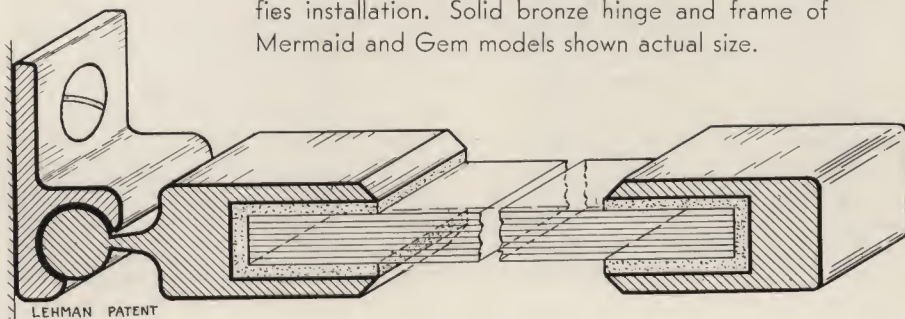

533-6 Enclosure for recess shower.



533 Same with No. 1 door—no grille.

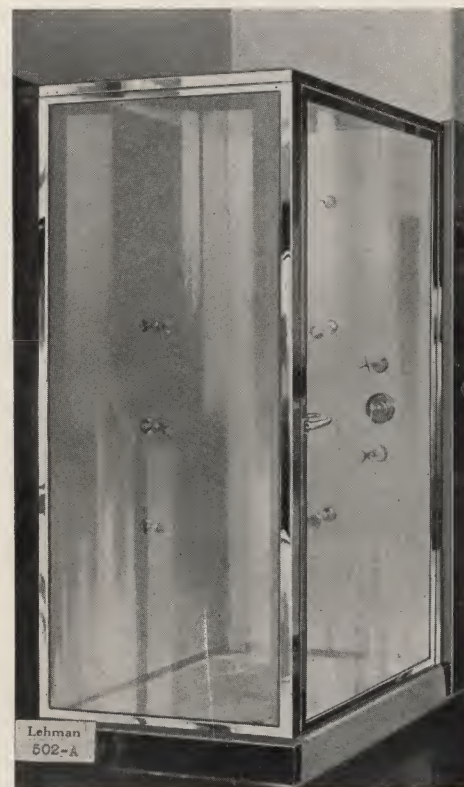

502-A Corner shower bath compartment. Any door or glass decoration available. See page 10 for shower compartments.

LEHMAN SPRAYSHIELD COMPANY, 2514-18 N. BROAD ST., PHILADELPHIA, PA.

LEHMAN DOORS FOR SHOWER STALLS

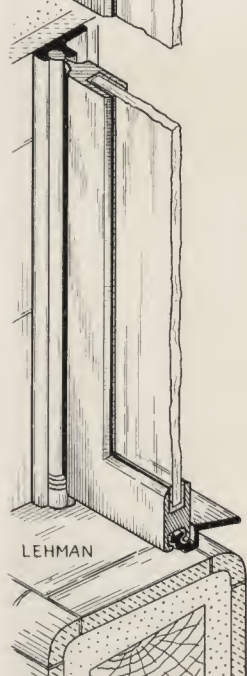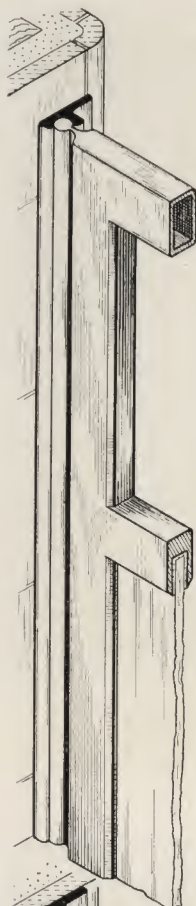

Vertical section through Lehman shower bath door showing continuous solid bronze hinge assembly and telescoping apron with concealed drip trough.



1 Shown right hinged on marble. 711 glass design is illustrated.



2 Plain ventilator design. Made in all Lehman models.



4 Grille rods of solid bronze. Standard door—popular design.

If It Adjusts UP and DOWN It's a LEHMAN Shower Door

HIDDEN MONOSLEEVE HINGE (pat), an exclusive Lehman feature, provides for raising or lowering door at any time, assuring water tightness by close threshold fitting. Adding or removing bearing shims compensates for building settlement, assures accurate alignment, saves installing time and costly rebuilding of door or tile. Made for erection on tile, marble, structural glass, metal compartments, etc.

SIZES

Standard Doorway, 24"x72", finished tile dimensions, but doors are tailored to measure, for new or old buildings. Sill should drain inward $\frac{3}{8}$ ". Ask for detail and measurement sheets. Lehman mounting bucks, if used, are attached to studs before erecting tile or structural glass.

SHOWER BATH DOORS

Lehman doors are custom made in any design in our Swan, Mermaid or Gem models, with monosleeve hinge. Models are similar in appearance, operation and guarantee but differ in bronze weight, glass quality and details. Viking doors with piano hinges are made in the same designs.

Most Lehman doors are reversible for right or left hanging without exposed assembly screws inside or outside. Clear glass, polished chromium and tile fittings are regular. Glass decorations, satin, or gold plating, etc., are extra. Obscure glass is optional. Ventilating tops swing with doors, but may be stationary where height permits head clearance. Several types of interchangeable aprons, sills and rubber sealing devices are available to suit all threshold conditions. Our new telescoping apron has a concealed trough to carry drippage inward when door is opened. Latch with floating bolt on all models. Swan and Mermaid have forged bronze stream-lined handles—Gem and Viking, loop handles. Door checks provided with Swan square top doors.

MIRROR DOORS. A full length mirror can be used in place of clear glass. Ideal for special medicine cabinets and linen closets. When used to enclose toilets, mirror doors are usually set about 6 inches above the floor to line up with shower doors. Mirror backs protected by enameled or plated metal, bakelite, or other suitable material.

For specifications of models see page 17.

LEHMAN SPRAYSHIELD COMPANY, 2514-18 N. BROAD ST., PHILADELPHIA, PA.


LEHMAN DOORS FOR SHOWER STALLS



5 Ornamental grille with flower. 718 glass. Made in all Models.



7 For arched or square opening. 731 glass decoration is shown.

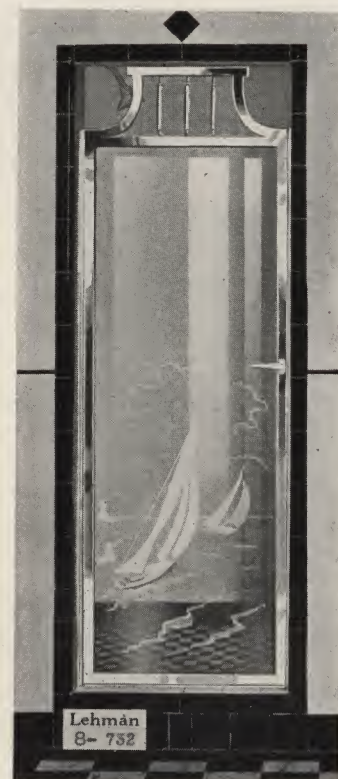

8 Attractive ventilator design. 732 glass decoration illustrated.



9 Scroll top is hand bent. 724 glass design illustrated.



11 Ventilator—flower design. 702 glass decoration is shown.





12 For flat and arched openings. Clear or ornamented glass used.

LEHMAN SPRAYSHIELD COMPANY, 2514-18 N. BROAD ST., PHILADELPHIA, PA.

LEHMAN SHOWER DOORS

ALL CUSTOM MADE - AVAILABLE IN ANY SIZE, DESIGN, OR GLASS DECORATION.

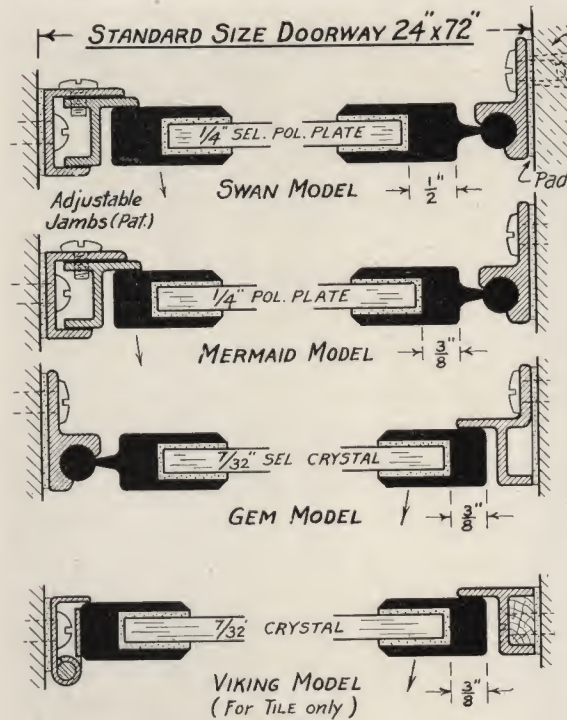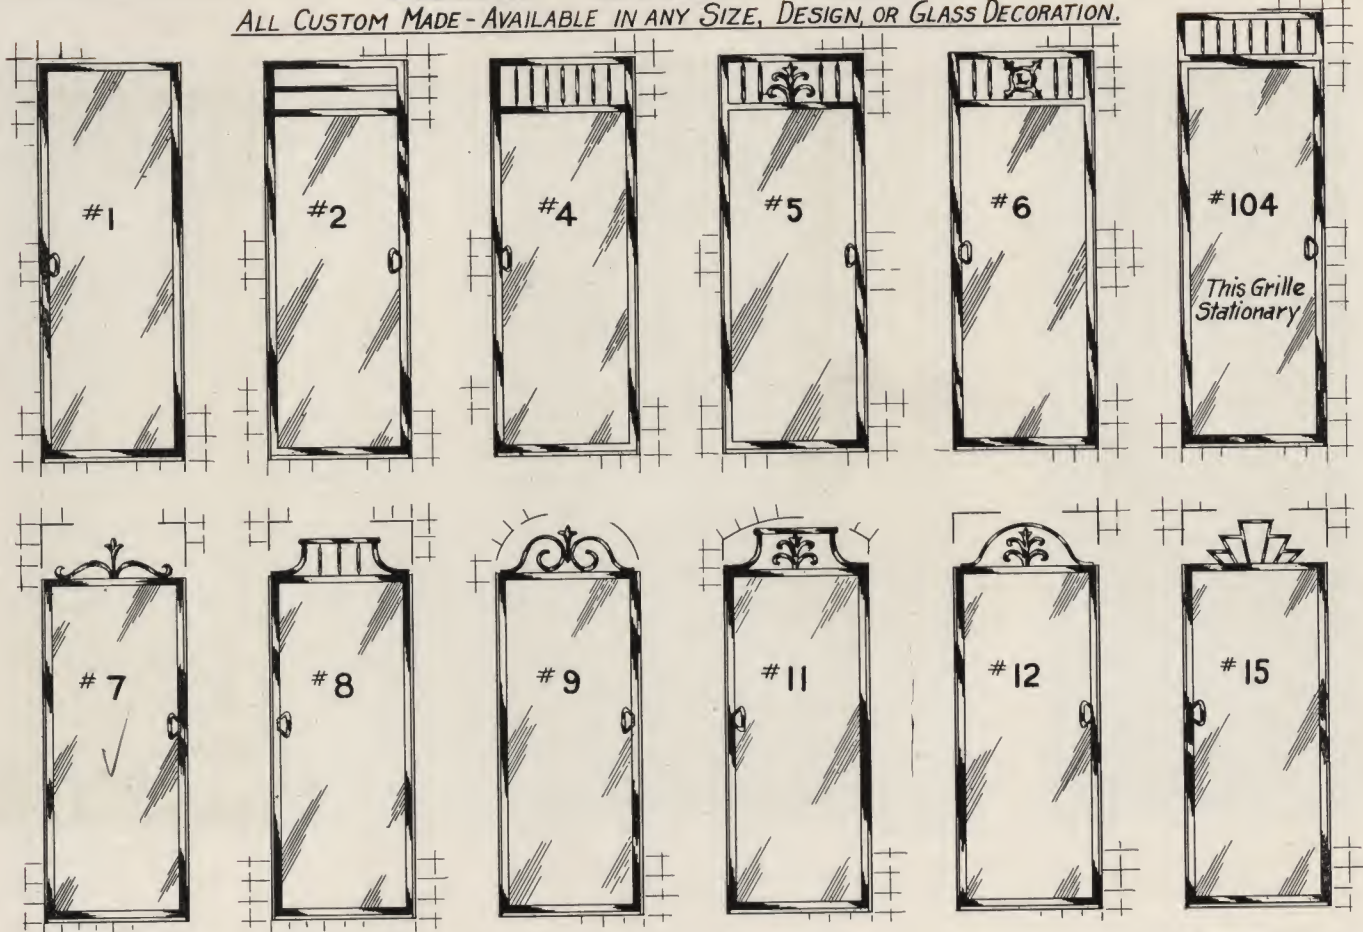

FITTINGS FOR TILE ARE STANDARD
Most LEHMAN DOORS Reverse, Right or Left, & Swing Out


SOLID BRONZE CHROMIUM PLATED
Not thin Sheet Metal or Aluminum

COPYRIGHT 1938 BY
LEHMAN SPRAYSHIELD CO.

LEHMAN SPRAYSHIELD CO.,

PHILADELPHIA, PA.




PRINTED IN U.S.A.

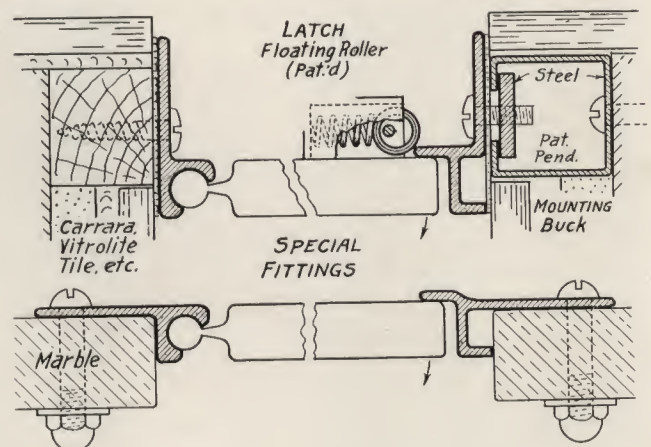

GRILLE
1/2" SOLID
SPINDLES



LEHMAN
MONOSLEEVE
HINGE (PAT'D)

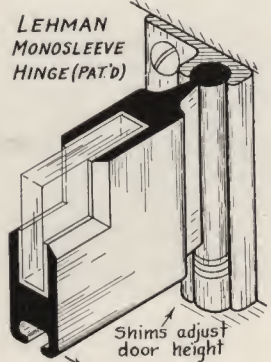

one inch

Revised 1938

DWGN^o 186

SHOWER BATH DOORS

Lehman shower doors and glass shower bath enclosures are made to measure for erection after tile and plumbing is completed. All can be furnished in Swan, Mermaid or Gem models with ventilator designs and glass decoration to specification. Doors and enclosure panels are shipped glazed, ready for erection.

Exclusive Lehman features include the monosleeve adjustable hinge, telescoping apron with concealed drip trough, full floating roller latch. Lehman mounting bucks shown on opposite page are special equipment on which doors, etc., may be erected without drilling tile or structural glass. The buck carries all strain and by adjustable tapping strip, provides accurate alignment in all directions.

Specifications of models, see page 17.



532 Shower enclosure with door and panel.
44 Stationary grille top.




532 Shower enclosure with pair of doors.
19 Ornamental scroll top.



6 Door—monogram grille.
724-727 glass illustrated.

LEHMAN CRYSTAL SHOWER COMPARTMENTS


Glass enclosures increase both the usable area and the apparent size of bathrooms because they eliminate bulky darkening partitions. They can be fitted into any available nook and thus make extra bathrooms practical in very limited spaces—ideal for modernization. In addition to these advantages they are economical, saving the cost of studding, lathe, cement and tile. Lehman construction is also adaptable for other uses, such as special display cases and medicine cabinets.

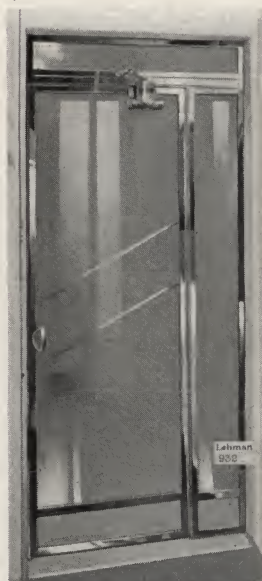

932 Shower enclosure adapted for use in steam room of public bath. Hand grip, kick plate and door check shown are special.

STEAM BATHS

When shower compartments are to be utilized for steam baths, Lehman doors can be furnished with shutter grilles. When louvers are open they appear like No. 4 door.

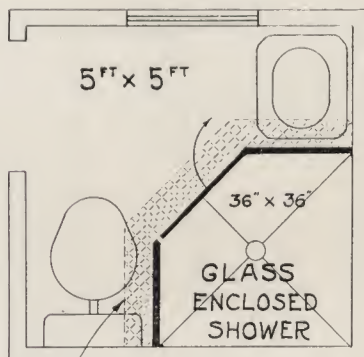

A complete bathroom in little space. Shaded area is saved by using glass panels instead of 6-inch partitions.





511 Shower bath compartment. No. 4 door shown. Door and Panel arrangement and sizes may be varied.

LEHMAN SHOWER ENCLOSURES


Notice the increased light and visual room area.
All compartments are custom built in Swan, Mermaid
or Gem models. Any design may be made any size.
Lehman monosleeve hinge on doors.

Solid bronze frames, polished chromium and
clear glass regularly furnished. Erected after
fixtures are set in new or old buildings on
walls of tile, marble or structural glass.

Diagrams show Left Hinge - Right Hinge optional.

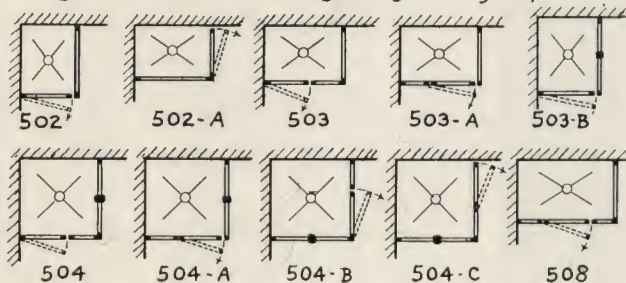
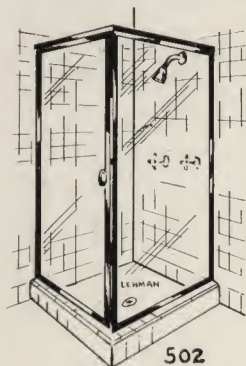


CORNER TYPE - TWO SIDES GLASS

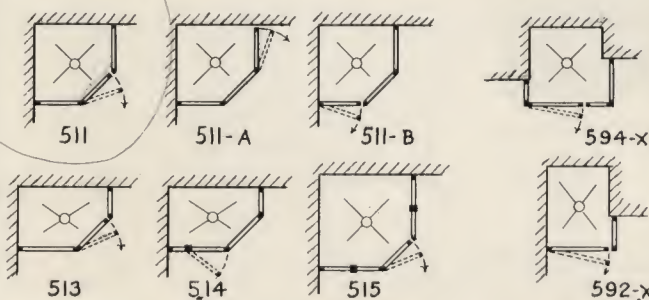



CORNER TYPE - 45° PANEL

SPECIAL TYPES

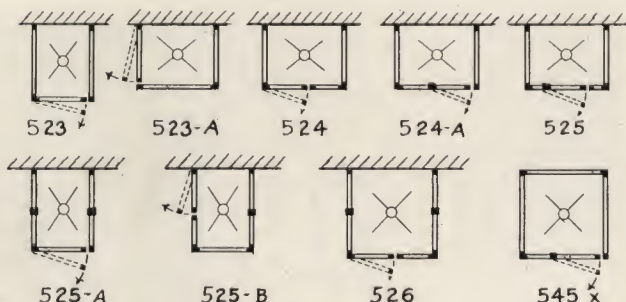

PIER TYPE - THREE SIDES GLASS


FOUR SIDES

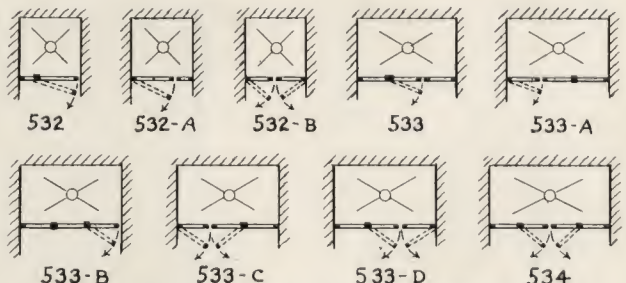

RECESSED TYPE - GLASS FRONT

TYPICAL VARIATIONS

Showing extra equipment

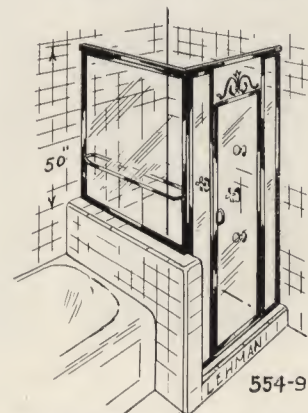

Tile buttress at one side.
#9 ventilator in door,
Hand rail & towel bar, special.



Curved glass corner
#4 grille in door and
#702-704 glass designs
are special.

Sizes may be varied to suit Bathroom conditions.
Oversize, Grilles, Glass Decoration, & Special Equipment are Extra.
Measurements taken on Center Line of Curb.

COPYRIGHT 1938 BY
LEHMAN SPRAYSHIELD CO.


LEHMAN SPRAYSHIELD CO., - PHILADELPHIA, PA.

PRINTED IN U.S.A.

DWG. NO. 172

Enclosure	Doors	Panels	Basic Size
502	1	1	28 x 34
503	1	2	28 x 40
504	1	3	40 x 40
508	1	3	28 x 40
511	1	2	40 x 40
513	1	2	28 x 46
514	1	3	28 x 46
515	1	4	48 x 48
523	1	2	28 x 34
524	1	3	28 x 40
525	1	4	28 x 40
526	1	5	40 x 40
532	1	1	30"
533	2	1	48"
534	2	2	60"
554	1	3	28 x 40
563	10" Radius		40 x 48
Standard Height 72 inches above Curb			

LEHMAN SHOWER BATH ENCLOSURES

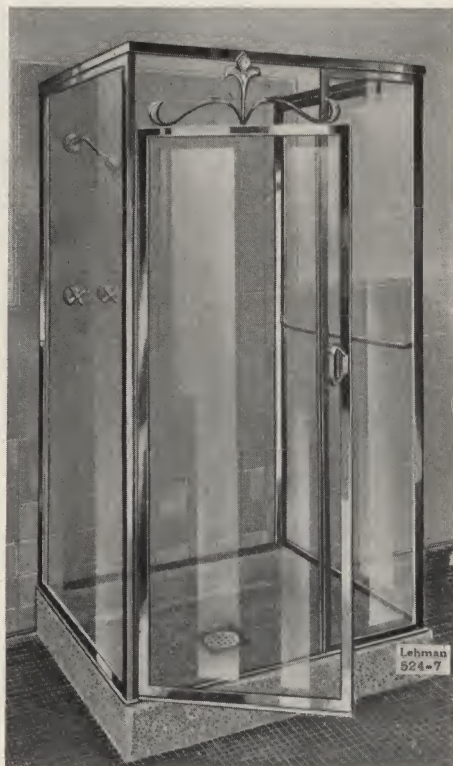

524-7 Compartment. No. 7 door shown. Hand grip is extra. Receptor No. 3042


Lehman Enclosures, whether Swan, Mermaid or Gem models, are made to fit all types of shower receptors. Do not build your shower to suit us, we adapt our equipment to your bath. Accurate tailoring reduces installation costs. Lehman enclosures fit with equal ease in new or old buildings. Measurements are taken and erection done after tile and plumbing fixtures are in place, making it unnecessary to delay construction for shower equipment. We can supply vitreous enameled or stainless steel panels to be applied to building walls to form the rear and sides of shower compartments. We recommend, as preferred practice, the use of tile or other materials for walls and receptors wherever capable contractors are available.



524 Crystal shower compartment. Adapters to hold fittings are extra.



553 Corner shower bath compartment. Buttress wall and glass panel add light.

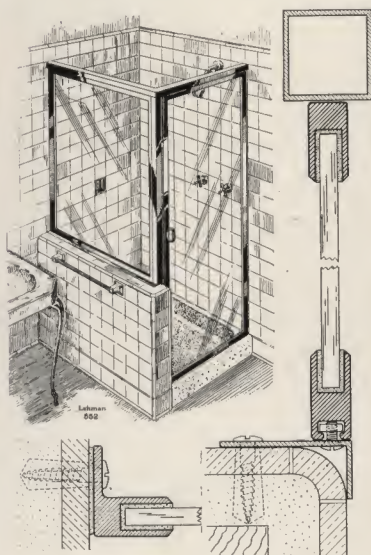


552 Enclosure with buttress walls instead of full height tile partitions—an alternate construction helpful in solving problems of arrangement and in locating fixtures. An otherwise dark shower enclosure may thus be brightened, increasing the apparent size and improving the general appearance of the bathroom.




454 Shower bath enclosure shown on tub built of tile. Towel bar as illustrated is special.

LEHMAN SPRAYSHIELD COMPANY, 2514-18 N. BROAD ST., PHILADELPHIA, PA.

LEHMAN BATHTUB SHOWER ENCLOSURES

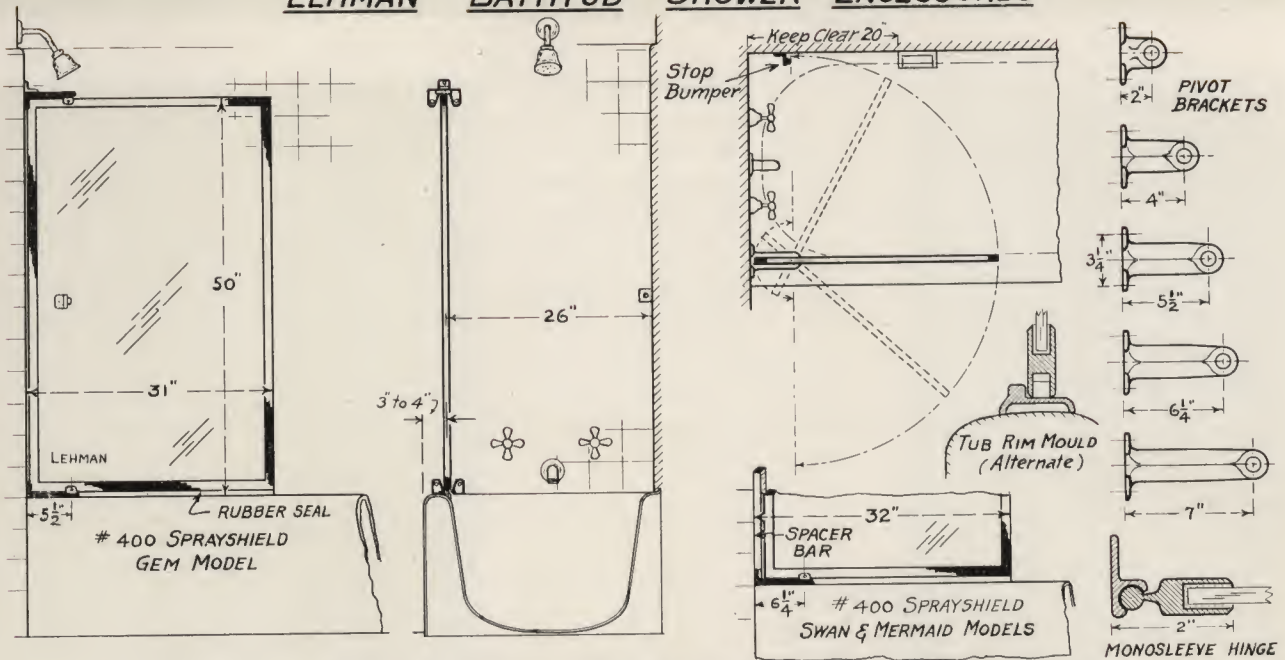

ALL CUSTOM MADE-AVAILABLE IN ANY SIZE-DESIGN COMBINATION-OR GLASS

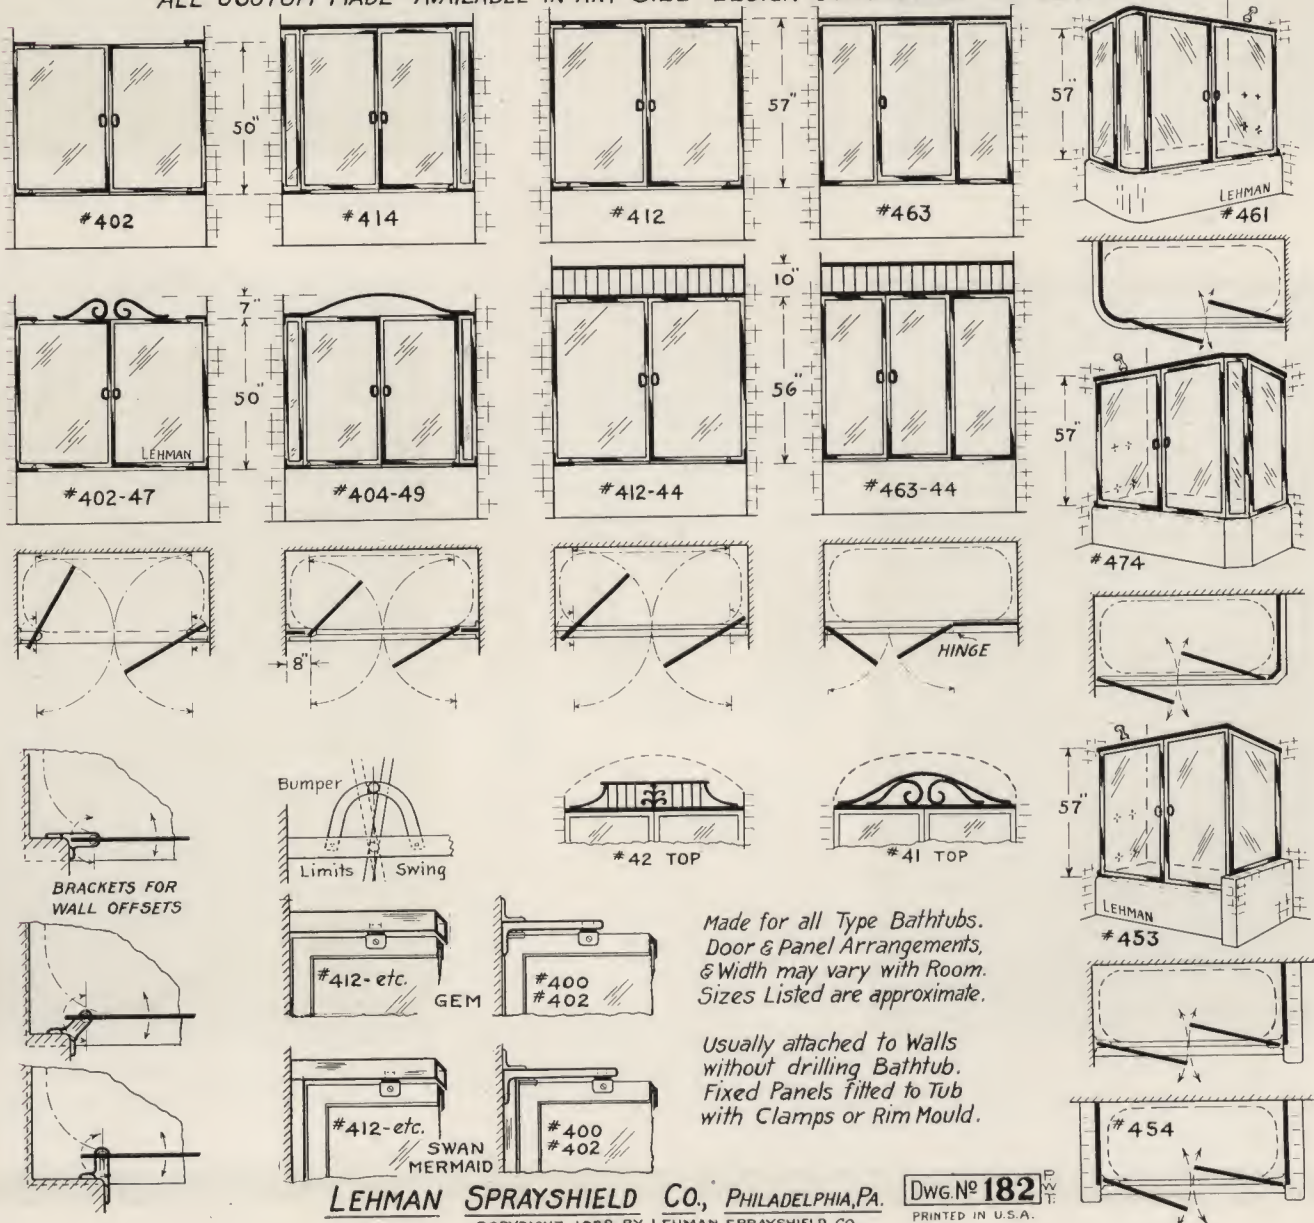

Made for all Type Bathtubs.
Door & Panel Arrangements,
& Width may vary with Room.
Sizes Listed are approximate.

Usually attached to Walls
without drilling Bathtub.
Fixed Panels fitted to Tub
with Clamps or Rim Mould.

LEHMAN SPRAYSHIELD CO., PHILADELPHIA, PA.
COPYRIGHT 1938 BY LEHMAN SPRAYSHIELD CO.

DWG. No 182
PRINTED IN U.S.A.

LEHMAN SHOWER BATH ENCLOSURES

LEHMAN PATENT
SPRAYSHIELDS

*If it swings
IN and OUT
it is a
LEHMAN
Sprayshield*

With Lehman equipment, any built-in tub serves as a shower compartment, bringing the freshness of sparkling glass and chromium instead of the unsanitary discomfort of . . . "Bathing in a Tent"



404-49 Sprayshields with side panels.
804-49 Same but for Four ft. bathtubs.
414 and 814 Same with straight header.

Only
LEHMAN
Sprayshields
fold inward
over bathtubs
with valve
clearance (pat.)



Also swing
outward,
permitting
full access
for tub
bathing and
cleaning.




400 Sprayshield for built-in bathtub.
Standard shield size for 30 in. wide tubs:
400 Gem Sprayshield approx. 31 x 50 in.
400 Swan and Mermaid approx. 32 x 50 in.



402-47 Shields for recess bathtub.
802-47 Same but for Four ft. baths.
402 and 802 Same without 47 scroll.

Installed after fixtures and tile, without drilling bathtub. Sturdy brass brackets on which shields swing, attached to wall, but all weight rests on tub. Sprayshields hang inside the drainage line of tub rim, with renewable rubber seal closing joint. Bumpers and latches to limit swinging are usually on top brackets or header, but stops for some types are attached to tile. Spacer bars at wall are furnished with Swan and Mermaid models. Fixed panels over bathtubs are held by rim mould or clamps, but tub may be drilled if preferred. Shields may also be made with monosleeve or piano hinges to swing in one direction only.











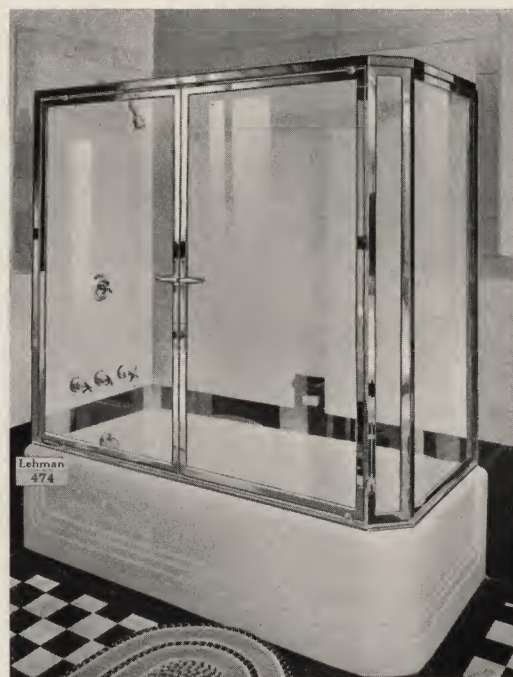


474 Enclosure for corner bathtub.
Panels follow 45° angle of bathtub.
Grille and decorated glass available.

LEHMAN SPRAYSHIELD COMPANY, 2514-18 N. BROAD ST., PHILADELPHIA, PA.











LEHMAN SHOWER ENCLOSURES FOR NEO-ANGLE BATHS

ALL CUSTOM MADE - AVAILABLE IN ANY DESIGN COMBINATION OR GLASS DECORATION

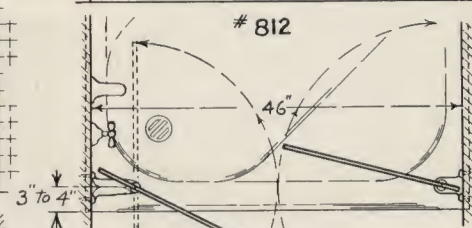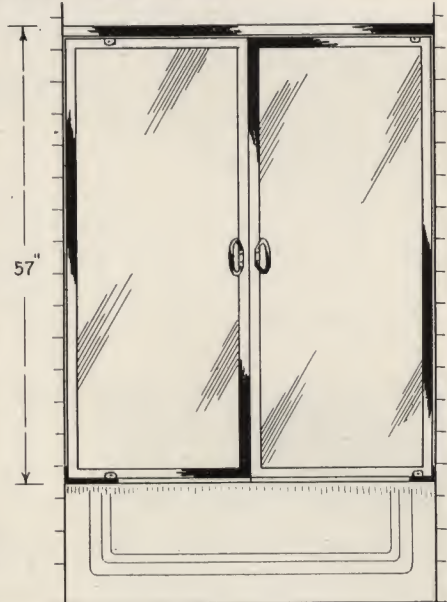

Gem Models shown - Swan and Mermaid have extra wall trim. Fittings for Tile are standard. Details may vary with Bathroom. Designs of Shower Doors are adaptable to these Enclosures

Continuous Hinges (90°) optional in place of Pivots with Patented inward and outward swinging. Special Fittings for Vitrolite, Carrara, etc. Stop Bumpers supplied as needed.

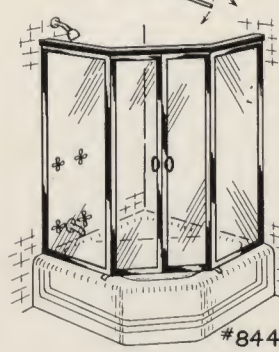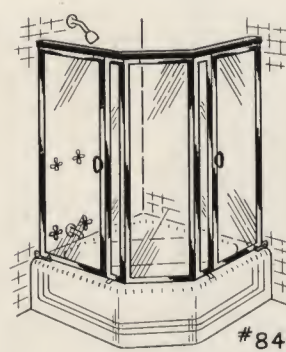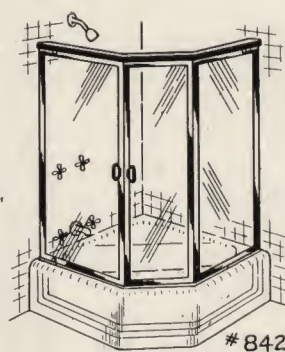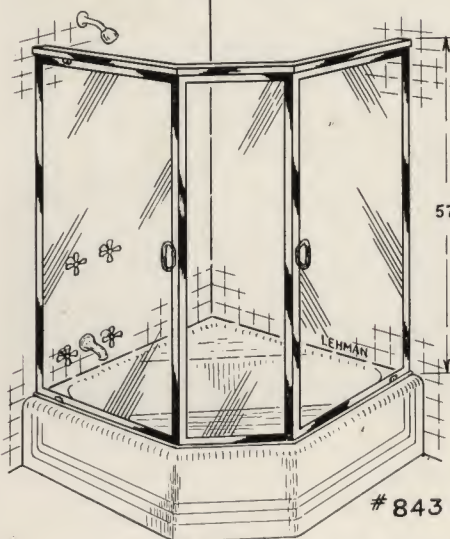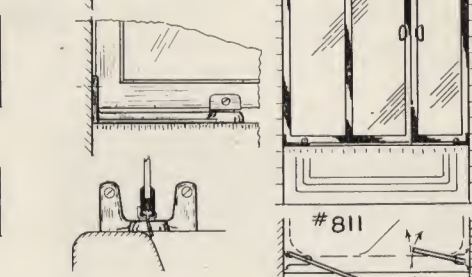

COPYRIGHT 1938 BY
LEHMAN SPRAYSHIELD CO
PRINTED IN U.S.A.

Standard Height 57", except #800 & #802. - Ornamental Tops, 7" to 10" - Sizes listed are approximate.

LEHMAN SPRAYSHIELD CO.,


PHILADELPHIA, PA.

DYWG. No 185

LEHMAN SHOWER BATH ENCLOSURES



843 Enclosure for corner Neo-Angle Bath.
842 Same with different door arrangement.

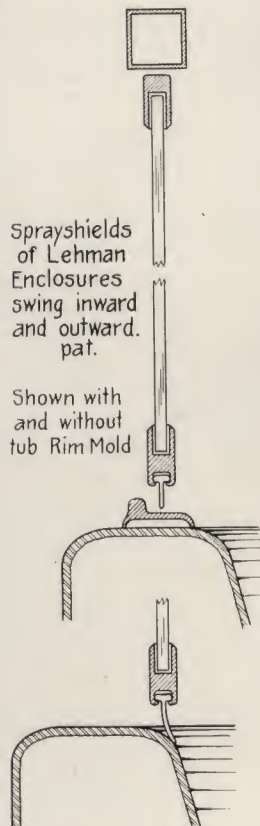

412 Enclosure for recess bathtub.
812 Same but for Four ft. bathtub.


LEHMAN SPECIALTIES

Adaptable to other fields. Details on request.

Lehman Latch with full floating roller bolt can be adapted for cabinet work, refrigerator and oven doors and general hardware purposes, providing easy spring action and security without binding. (pat.)

Mirror Frames of any size can be assembled with our pre-finished chromium mouldings. Concealed corner fittings join frame members and support mirror on wall. Save cost of beveling and drilling glass. (pat. pend.)


Bucks for fastening doors, windows, etc., direct to studding without drilling of tile, marble, vitrolite, carrara, etc. Movable tapping strip in special channel provides accurate alignment. Available in various sizes. (pat. pend.)

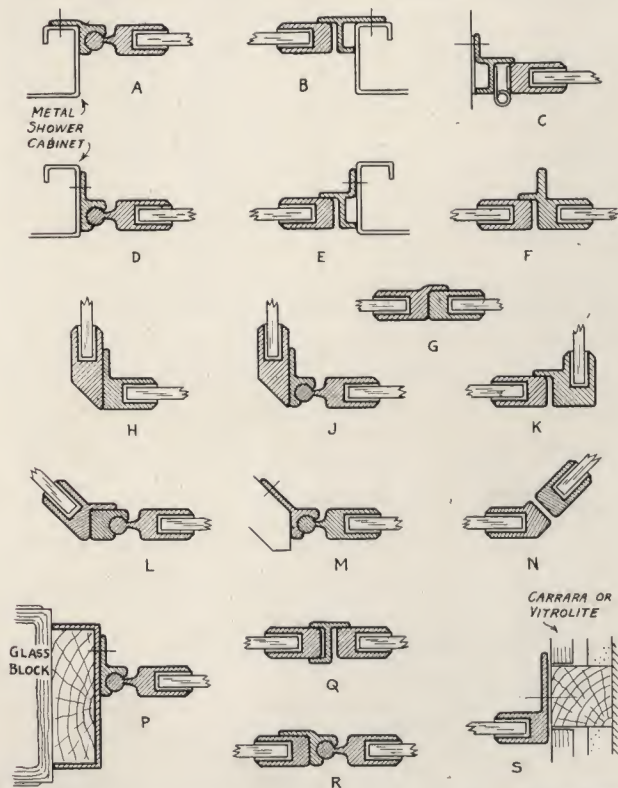














one inch LEHMAN SPRAYSHIELD CO., PHILADELPHIA, PA. DWG. NO 189

A few typical details of hinge, jamb, corner construction, etc., for tub and compartment enclosures.

LEHMAN TERRAZZO RECEPTORS

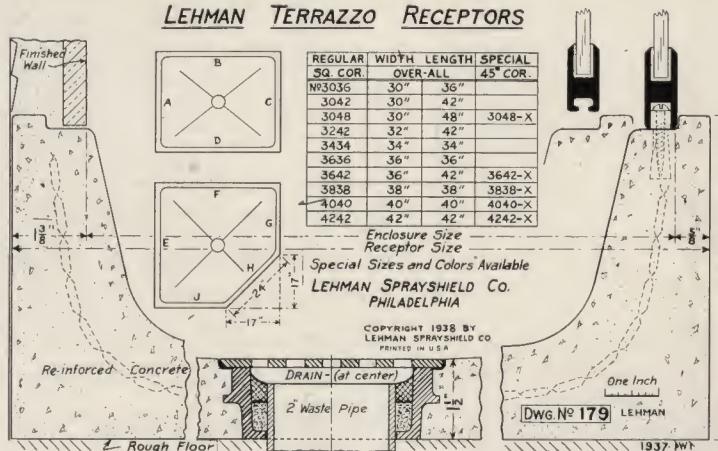

TYPICAL GLASS DECORATIONS FOR LEHMAN SHOWER ENCLOSURES

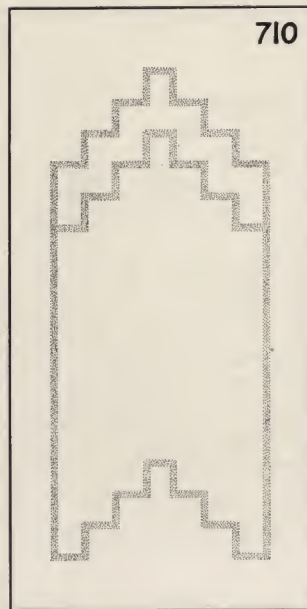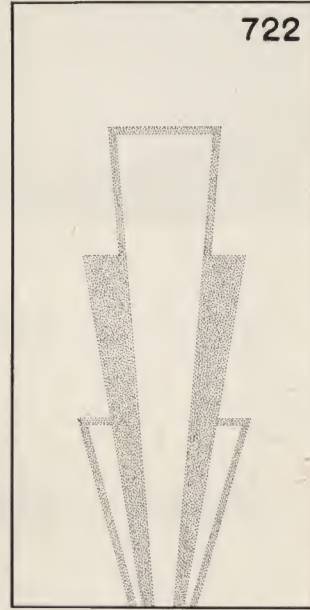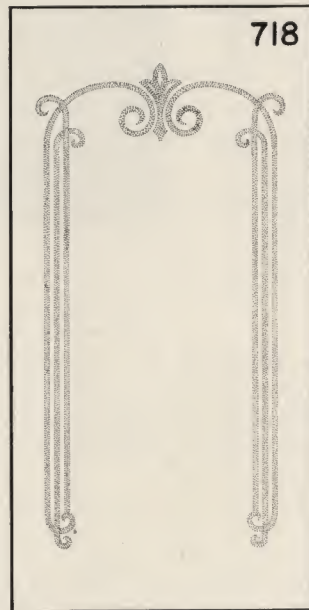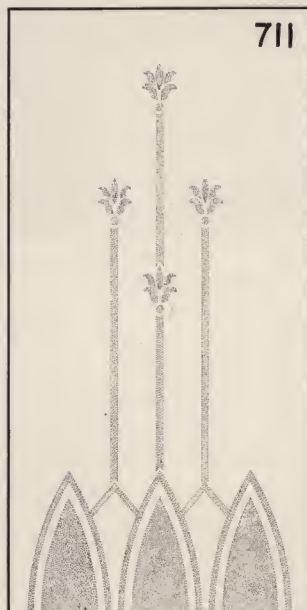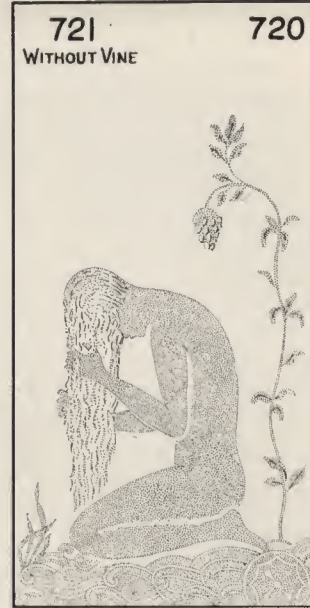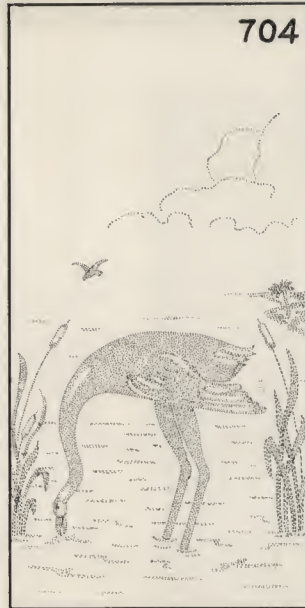

Glass Decorations

Each glass is individually treated—Your sketch or a combination of designs may be etched—Cost varies with art work and amount of detail—Tinting is extra—Any kind of glass or mirror may be ornamented—Figures are frosted on clear background, but may be reversed—Decoration usually on outside of shower—Designs are sand carved except 726 & 727, which are cut glass—

LEHMAN SHOWER BATH ENCLOSURES

GENERAL INFORMATION

For erection of Lehman shower bath enclosures, tile, plumbing or other construction see your contractor. In some areas our representative can quote "erected." Equipment is sold F. O. B. factory (or warehouse city). We guarantee that freight will not exceed 5% of list.

Shipping weight varies with models:

Doors, 110-140 lbs.	No. 511, 225-275 lbs.
No. 533, 175-225 lbs.	No. 400, 100-115 lbs.
No. 812, 140-160 lbs.	No. 412, 160-190 lbs.

Instead of monosleeve hinge or bracket pivots, we can furnish special piano hinges when specified. Sliding panels or doors with curved glass can be produced, but are not recommended. Grilles and top ornaments are usually 7" to 10" high. A hinged door or shield should not exceed 16 sq. ft. in area nor a stationary panel 20 sq. ft.

Data below is offered to facilitate comparisons:—

Plate Glass—high quality with polished and ground true surfaces. Regardless of thickness or hyphenated names, unpolished glass is not plate.

Crystal Glass—thick, flat drawn sheet glass. When viewed at angle it reveals slight waves.

Tapestry, Velvex—trade names of obscure glass.

Safety—laminated glass plate or window quality.

Battleship—tempered glass 4 times reg. strength.

Brass Gauge	Thickness	Weight, Sq. Ft.
* # 8 (1/8")	.128 inch	4.24 lbs.
* # 9	.114 inch	3.78 lbs.
* # 10	.102 inch	3.38 lbs.
* # 11 (3/32")	.091 inch	3.02 lbs.
# 12	.081 inch	2.68 lbs.
# 13	.072 inch	2.38 lbs.
# 14 (1/16")	.064 inch	2.12 lbs.
# 16	.051 inch	1.69 lbs.
# 18	.040 inch	1.33 lbs.
# 20 (3/64")	.032 inch	1.06 lbs.

*Gauge at thinnest points of standard Lehman bronze shapes. Some minor parts are 14 gauge.

Sample Specifications

Insert details of models and approximate sizes.

Shower doors (sprayshields, enclosures) shall be _____model_____design, as manufactured by Lehman Sprayshield Company, Philadelphia, Pa. Glass shall be _____quality, _____thickness _____weight per square foot, cushion set under pressure in bronze channels weighing a minimum of _____lbs. per ft. Chromium plating shall be applied over polished nickel base.

A—Shower doors and compartments shall have monosleeve, continuous hinges that are vertically adjustable to compensate for building settlement. Spring latch to have floating bolt.

B—Bathtub sprayshields and enclosures shall be mounted on pivots to swing outward and also inward with clearance space for valves.

Shower enclosures (doors, sprayshields) shall be supplied and erected by the _____contractor, who shall furnish verified measurements and job data to the manufacturer for custom fabrication.

Only Lehman patent enclosures meet the above specifications. They are constructed with liberal quantities of finest materials to give lasting service. We do not make featherweight equipment. Protect your clients against substitution. Send copy of specification to factory to insure quotation on proper equipment. On request our engineering department will furnish details to be incorporated in architect's plans.

SWAN, MERMAID, GEM and VIKING MODELS are similar in appearance, efficiency and guarantee, but differ in weight of bronze, quality of glass and minor detail. All models custom made for the requirements of each bathroom.

SWAN—de luxe

Glass—3/4" selected polished plate, 52 oz. (polished tapestry optional).

Frames—extra heavy bronze. Grille spindles solid 1/2" dia. lathe tapered.

Glazing channel 1 1/4" x 3/16" with base 1/2" solid, and walls 3/16" thick.

Weight—door channel 1.55 lbs. per ft. Hinge assemblies 2.90 to 3.15 lbs.

Forged bronze streamline handles, with integral latch and floating bolt.

DOORS—monosleeve hinge, adjustable tile jamb, apron, door check, etc.

SPRAYSHIELDS—swing inward and outward on brackets—spacer bar at wall.

ENCLOSURES—de luxe equipment, custom made to suit room requirements.

51 lbs. bronze in No. 4 door 24 x 72 in. 30 lbs. in No. 400 sprayshield.

MERMAID—standard

Glass—3/4" polished plate, 52 oz. per sq. ft. (tapestry glass optional).

Frames—solid bronze. Grille spindles solid 1/2" diameter lathe tapered.

Glazing channel 1 1/8" x 3/16" with base 3/8" solid, and walls 3/16" thick.

Weight—door channel 1.25 lbs. per ft. Hinge assemblies 2.55 to 2.80 lbs.

Forged bronze streamline handles with integral latch and floating bolt.

DOORS—monosleeve hinge, adjustable tile jamb, telescoping apron.

SPRAYSHIELDS—swing inward and outward on brackets—spacer bar at wall.

ENCLOSURES—standard model, custom made to suit room requirements.

45 lbs. bronze in No. 4 door 24 x 72 in. 25 lbs. in No. 400 sprayshield.

GEM—popular

Glass—3/32" selected crystal 45 oz. per sq. ft. (1/4" velvex optional).

Frames—solid bronze. Grille spindles solid 1/2" diameter lathe tapered.

Glazing channel 1 1/8" x 3/16" with base 3/8" solid, and walls 3/16" thick.

Weight—door channel 1.25 lbs. per ft. Hinge assemblies 2.55 lbs.

Offset loop handles. Adjustable spring latch with floating bolt.

DOORS—Pat. monosleeve hinge, plain jambs, telescoping drainage apron.

SPRAYSHIELDS—Patent inward-outward swinging with access to valves.

ENCLOSURES—Popular model, custom built to suit bathroom requirements.

39 lbs. metal in No. 4 door 24 x 72 in. 20 lbs. in No. 400 sprayshield.

VIKING—doors only

Glass—3/32" crystal 45 oz. per sq. ft. Cushion glazed under pressure.

Frames—solid bronze. Grille spindles solid 1/2" diameter lathe tapered.

Glazing channel 1 1/8" x 3/16" with base 3/8" solid, and walls 3/16" thick.

Weight door channel 1.25 lbs. per ft. Piano hinge 14 ga. with 3/16" pin.

Offset loop handles. Adjustable spring latch with floating bolt.

DOORS—heavy piano hinge, plain jamb, apron. 33 lbs. metal in No. 4 door.

A custom made, exceptionally sturdy, low-priced shower door for tile only.

ALL MODELS—Metal, Glass, Plating, Sizes

METAL glazing channels, extruded bronze with solid base 1/2" to 3/8" thick.

Walls of channels, etc., are 3/8" to 3/32". Minor parts of drawn brass are from 3/16" to 3/8". No thin sheet metal, light-weight tubing or aluminum.

Special high strength alloys used in strain parts, screws, etc.

GLASS—clear is standard. Obscure glasses as listed are optional.

Decoration is extra and is regularly placed on outer surface of glass.

Tinted glass, safety glass, wired glass, "battleship" glass, mirror or solid panels can be furnished in place of clear glass, as an extra.

PLATING—chromium over nickel base and full polish is standard finish.

Satin chromium, gold plating and all other finishes are special.

SIZES—standard, for door openings finished 24 inches by 72 inches.

Standard sizes of single sprayshields for 30 inch wide bathtubs:

No. 400 Gem shield 31" x 50". No. 400 Swan and Mermaid 32" x 50".

Regular prices apply to approximate standard sizes and smaller.

Additional height or width above standard add moderate extra charge.

Boxing, screws, expansion anchors, caulking, etc., are included.

Manufacturer reserves right to revise specifications and to alter details

to requirements of custom manufacturing for individual bathrooms.

LEHMAN SPRAYSHIELD COMPANY, 2514-18 N. BROAD ST., PHILADELPHIA, PA.

DISPLAYS and REPRESENTATIVES

Before deciding on your bathroom arrangement and shower equipment see LEHMAN display—usually located in plumbing wholesaler's show rooms.

Write for "measurement and roughing in" sheets for any desired item or have our representative survey bath room, take measurements, make recommendations and submit estimate without obligation.

* LEHMAN representative in these cities.

ALABAMA
Birmingham

ARKANSAS
* Little Rock

CALIFORNIA
* Los Angeles
* San Francisco

CONNECTICUT
* Bridgeport
New Haven

COLORADO
* Denver

DELAWARE
Wilmington

DIST. of COL.
* Washington

FLORIDA
Ft. Lauderdale
Jacksonville
* Miami
St. Petersburg

GEORGIA
* Atlanta

ILLINOIS
* Chicago

INDIANA
* Indianapolis
Lafayette

IOWA
Cedar Rapids
Des Moines
Sioux City

KANSAS
* Kansas City
Wichita

KENTUCKY
Louisville

LOUISIANA
* New Orleans

MAINE
Lewiston

MARYLAND
* Baltimore

MASSACHUSETTS
* Boston
Dorchester
Haverill
Lawrence

MICHIGAN
* Battle Creek
* Detroit
Saginaw

MINNESOTA
* Minneapolis
St. Paul

MISSOURI
* Kansas City
* St. Louis

MONTANA
* Helena

NEBRASKA
* Omaha

NEW JERSEY
Allenhurst
Atlantic City
Camden
East Orange
Montclair
* Newark

NEW YORK

* Albany
Buffalo
Long Island City
* New York
* Rochester
* Syracuse
Utica
Watertown

NORTH CAROLINA
* Charlotte

OHIO
* Cincinnati
* Cleveland
* Columbus
Dayton
Toledo

OKLAHOMA
* Oklahoma City

OREGON
* Portland

PENNSYLVANIA
Allentown
Bethlehem
Bryn Mawr
Erie
* Harrisburg
Hazleton
Jenkintown
Lansdowne
* Philadelphia
* Pittsburgh
Pottstown
Pottsville
Reading
Scranton
Wilkes-Barre

TENNESSEE
Memphis
Nashville

TEXAS
Austin
Corpus Christie
* Dallas
Ft. Worth
* Houston
San Antonio
Tyler
Waco

VIRGINIA
Danville
Lynchburg
Rosslyn
* Richmond
Staunton

WASHINGTON
* Seattle
* Spokane

WISCONSIN
* Milwaukee

BERMUDA
Hamilton

CANADA
London
* Montreal
Quebec
* Toronto
* Vancouver

CUBA
Havana

WAREHOUSE STOCKS — LEHMAN doors and sprayshields in popular models and standard sizes carried in stock in many cities. LEHMAN policy is to build each enclosure for its individual bathroom but where time is very limited this warehouse service provides for immediate delivery.

PATENTS: U. S. des. 84,041, U. S. des. 84,042, U. S. 1,392,580, U. S. 1,672,418, U. S. 1,672,419, U. S. 1,693,088, U. S. 1,708,545, U. S. 1,754,719, U. S. 279,224, U. S. 1,841,898, U. S. 291,754, U. S. 296,950, U. S. 297,139, U. S. 1,944,440, U. S. 2,110,336, Eng. 267,425, Eng. 260,170, France 615,605, Belgium 335,094, Can. 273,974, Can. 269,550, others pending.



We acknowledge the assistance of the American Institute of Architects in criticising the subject matter and form of presentation of this publication.


LEHMAN SPRAYSHIELD COMPANY
is a member of
THE PRODUCERS COUNCIL, Inc.

LEHMAN SPRAYSHIELD COMPANY

SHOWER DOORS and BATHTUB SPRAYSHIELDS

2514-18 NORTH BROAD STREET, ♦ ♦ PHILADELPHIA, PA.

LEHMAN SOLID BRONZE SHAPES - SECTIONS ACTUAL SIZE

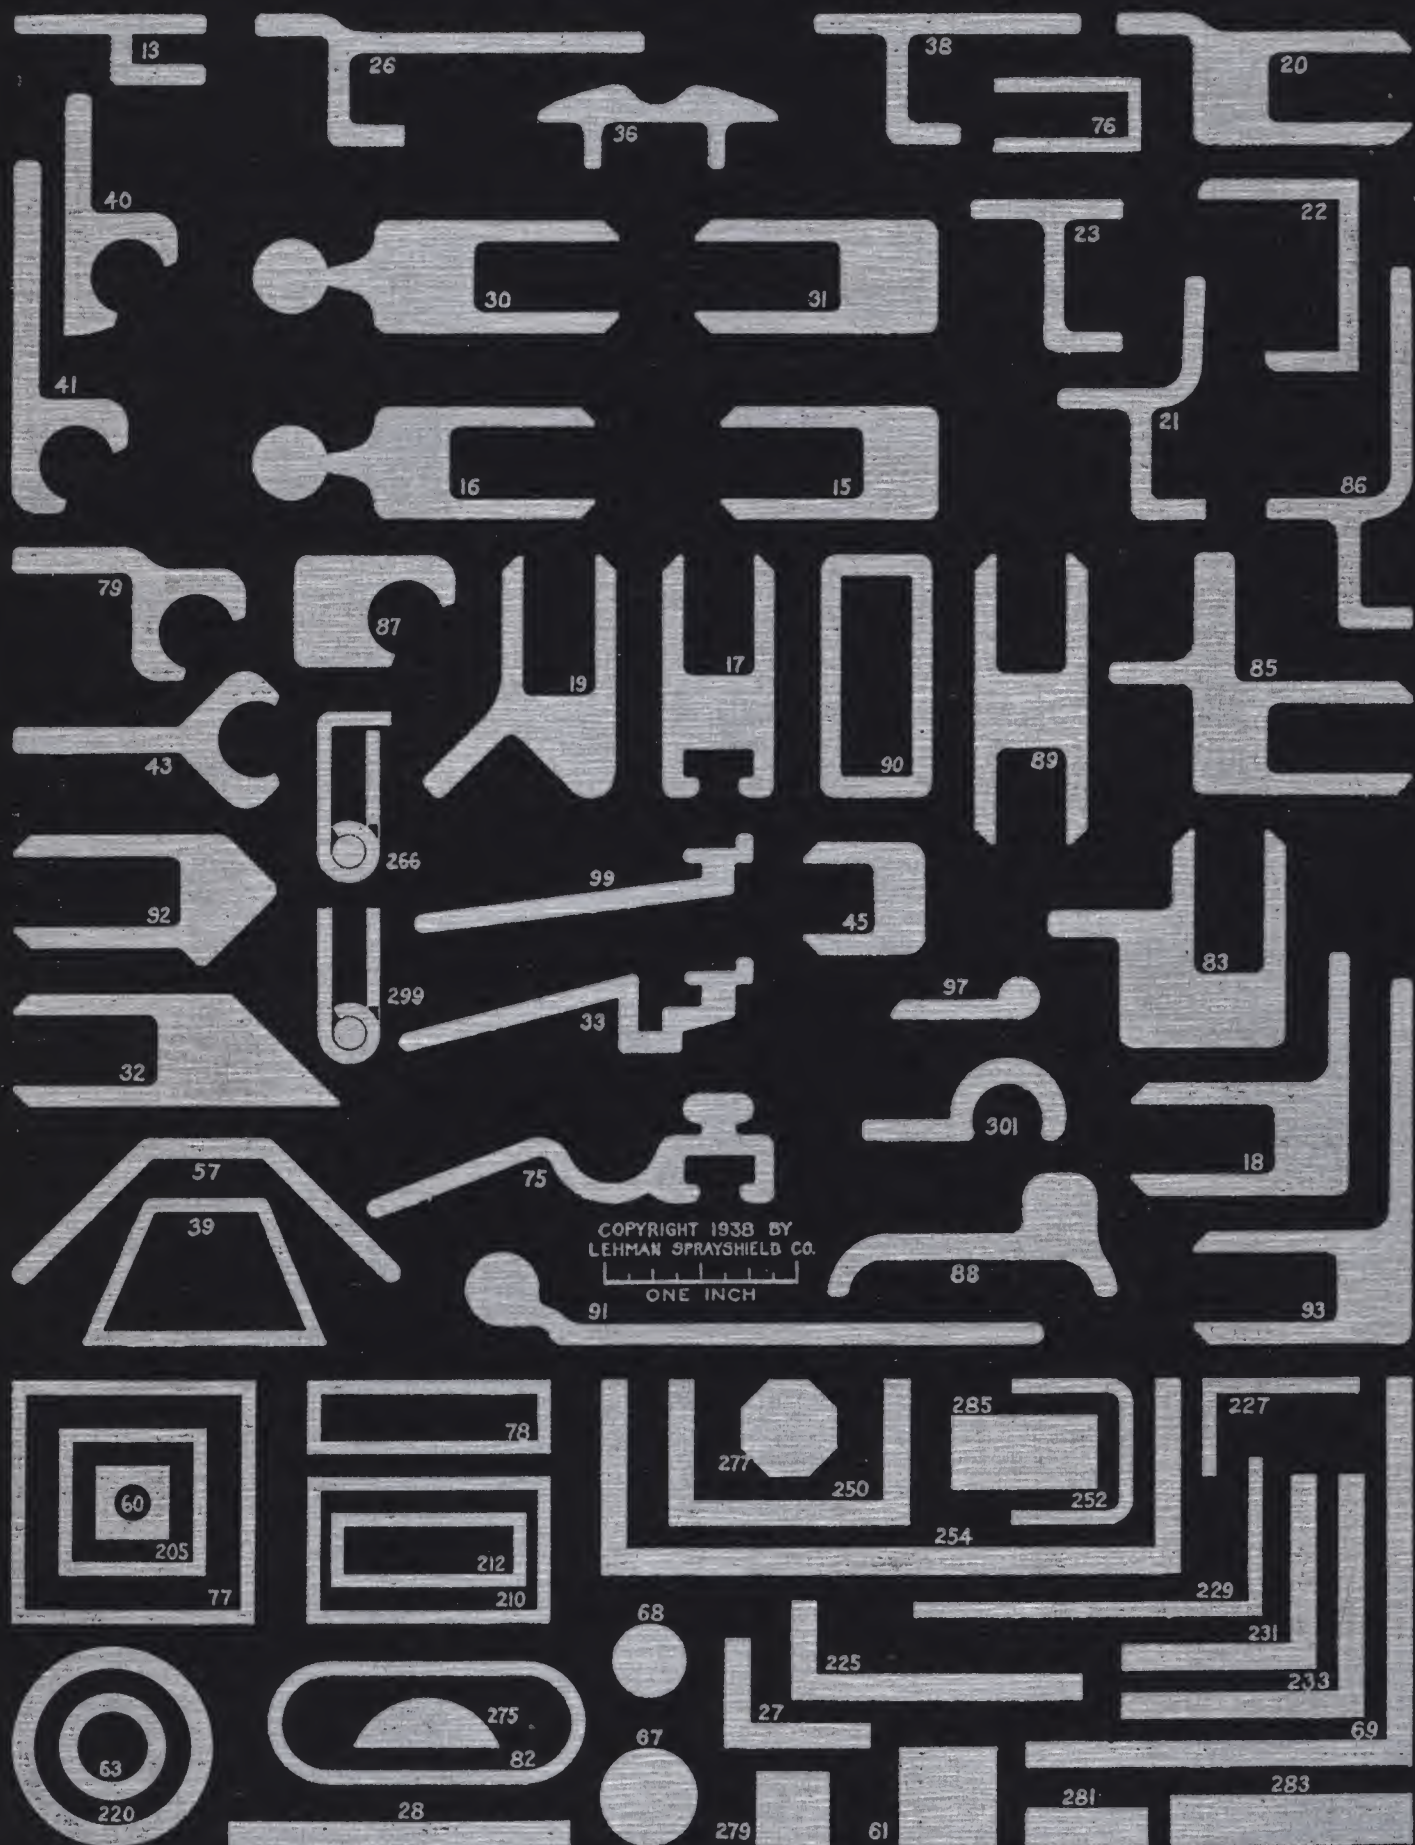

A FEW OF THE ANGLES, CHANNELS, RODS AND TUBES IN LEHMAN STOCK

SHOWER BATH ENCLOSURES

LEHMAN SPRAYSHIELD CO.

2514-18 North Broad Street
Philadelphia, Pa.

A. I. A. File No. 29-H-3



CATALOGUE "E"

Printed in U. S. A.

Copyright 1938 by Lehman Sprayshield Company

Digitized by:



ASSOCIATION FOR PRESERVATION TECHNOLOGY

www.apti.org

For the

BUILDING TECHNOLOGY HERITAGE LIBRARY

<https://archive.org/details/buildingtechnologyheritagelibrary>

From the collection of:



SOUTHEASTERN ARCHITECTURAL ARCHIVE
SPECIAL COLLECTIONS
HOWARD-TILTON MEMORIAL LIBRARY

<http://seaa.tulane.edu>